

UHF QUADPLEXER, DUAL 453-467 MHz


MBC45-4-FBP

Product Features

- External branching for UHF dual subband BDAs M Series, H series or DH Series
- For 453-454 / 458-459 / 460-462 / 465-467 MHz applications
- Combiners both UL and both DL into the same connector
- Both ends into the same box.
- NEMA4X



Frequency Distribution

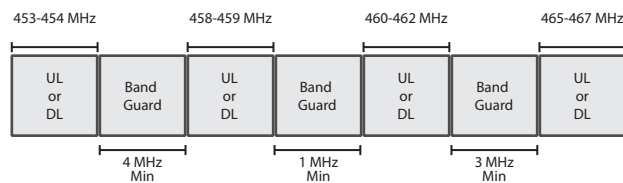

Specifications

Value

Frequency distribution	453-454 / 458-459 / 460-462 / 465-467 MHz
Insertion loss	5dB max
Between bands isolation	>70dB
Power handling capability	50W CW
Impedance	50Ω
Connectors	N(f)
Minimum frequency distribution	See diagram
Mounting	Wall Mount
Dimension	20.2 x 18.2 x 9 inches • 514 x 462 x 230 mm
Temperature range	-4° to 158° F • -20° to +70° C

