# INDOOR OMNI CEILING ANTENNA 698-869 MHz

#### **Product Features**

- PS700 & PS800 full band
- Omni Directional Ceiling Antenna
- Max Power 100W



Electrical Specifications	Value
Frequency Range	698-869 MHz
Gain	3 dBi
VSWR	≤1.5
Polarization	Vertical
Horizontal Beamwidth	360°
Vertical Beamwidth	55°
Input Impedance	50 Ω
Max. Input Power	100 W
Lightning Protection	DC Ground
Mechanical Specifications	Value
Connector	N Female
Dimensions	Ø165*95mm
Weight	0.25 kg
Color	White
Radome Material	ABS
Operating Temperature	-40℃ to +65 ℃




## BDA-OIA-698869-3-1

### INDOOR OMNI CEILING ANTENNA 698-869 MHz

BDA-OIA-698869-3-1

#### **Radiation Patterns**

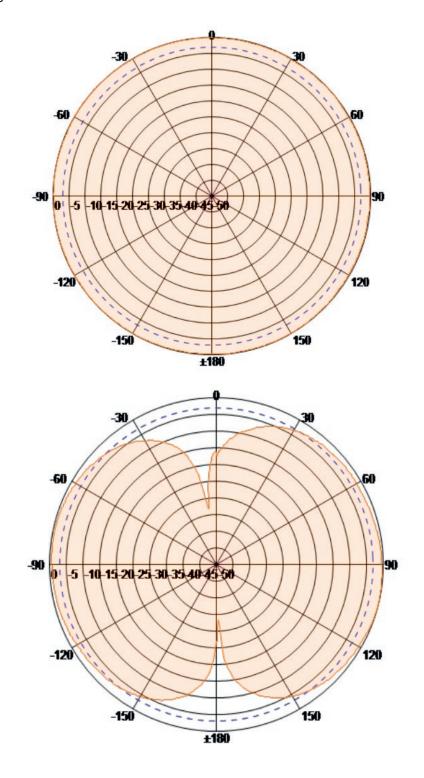

Honeywell Business Solutions 715 Peachtree Street NE Atlanta, GA 30308 www.honeywell.com HON-62089.01 • 03262021 @2020 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited. This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice. Country of origin: U.S.A. THE FUTURE IS WHAT WE MAKE IT

