

FIBER GLASS OMNI ANTENNA

763 - 805 MHz

BDA-FA-763805-2-1

Product Features

- PS700
- Omni Directional Antenna
- Max Power 50W
- Fiberglass



Electric Specifications	Value
Frequency Range	763-805 MHz
Polarization Type	Vertical
Gain	2.15dBi
3dB Beam-Width. H-Plan	360°
3dB Beam-Width. E-Plan	80°
VSWR	≤1.5
Input Impedance	50Ω
Max Input Power.	50W
Lightning Protection	DC Grounded


Mechanical Specifications	Value
Connector Type	N-Type Female
Dimensions H*W*D (mm)	Φ22*210 (mm)
Radome Material	Fiberglass
Radome color	white
Operating Temperature Rang	-40°C/+60°C
Support Pole Diameter	φ30-φ60(mm)
Rated Wind Velocity	60m/s

FIBER GLASS OMNI ANTENNA


763 - 805 MHz

BDA-FA-763805-2-1

VSWR:

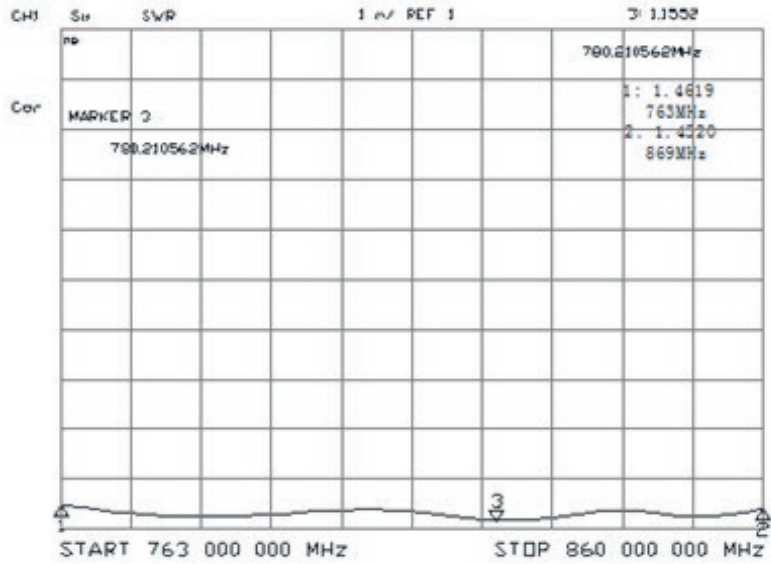

Radiation Pattern:

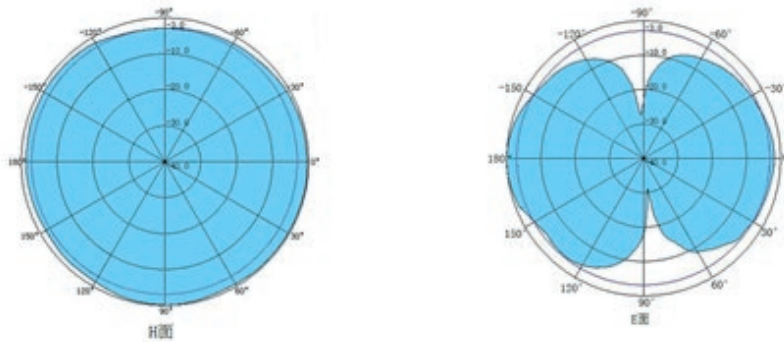

DOC HON62103.00 - 11092020 - DMC