

BASE MODULE FOR MULTIPLE TMAs

Power Supply and Alarms

TMABM-06

Product Features


- Provides power and alarm handling for a single or multiple TMA configuration.
- Supports Rx Only TMAs and / or Dual Duplexed TMAs, with no LNA backup option.
- Provides regulated DC power to the TMAs, with an input DC power of +27 and / or -48VDC, obtained from the BTS.
- Alarms outputs are available in order to check the system function, as flashing leds and as open contacts to be polled, in the bottom unit.



Specification

Value

Type	Indoor Tower Mounted Amplifier Base Module
Number of outputs	3
Input voltage, DC	(+ o -) 18 to 75V
Input current	1.2 A max
Output voltage	+14.8 VDC
Alarm outputs	Flashing LEDs and open contacts
Temperature range	-40° to 158° F • -40° to +70° C
Protection	IP50
Dimension	19 x 8 x 1RU inches • 482.6 x 203.2 x 1RU mm
Weight	4.5 lbs • 2 kg

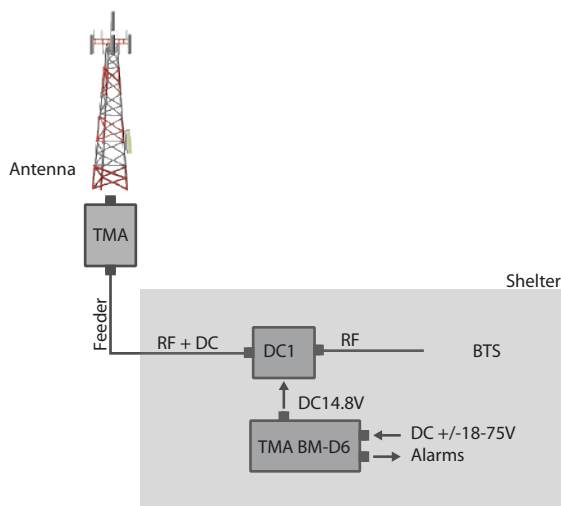

DOC TM002.05 - 11/20/2020
 Fiplex is a registered trademark of Fiplex Communications, Inc.
 Fiplex Communications, Inc. reserves the right to change specifications without prior notice.